


* May be varied to conform to type of entrance construction in approved subdivisions.


TYPE 1 RESIDENTIAL ENTRANCES

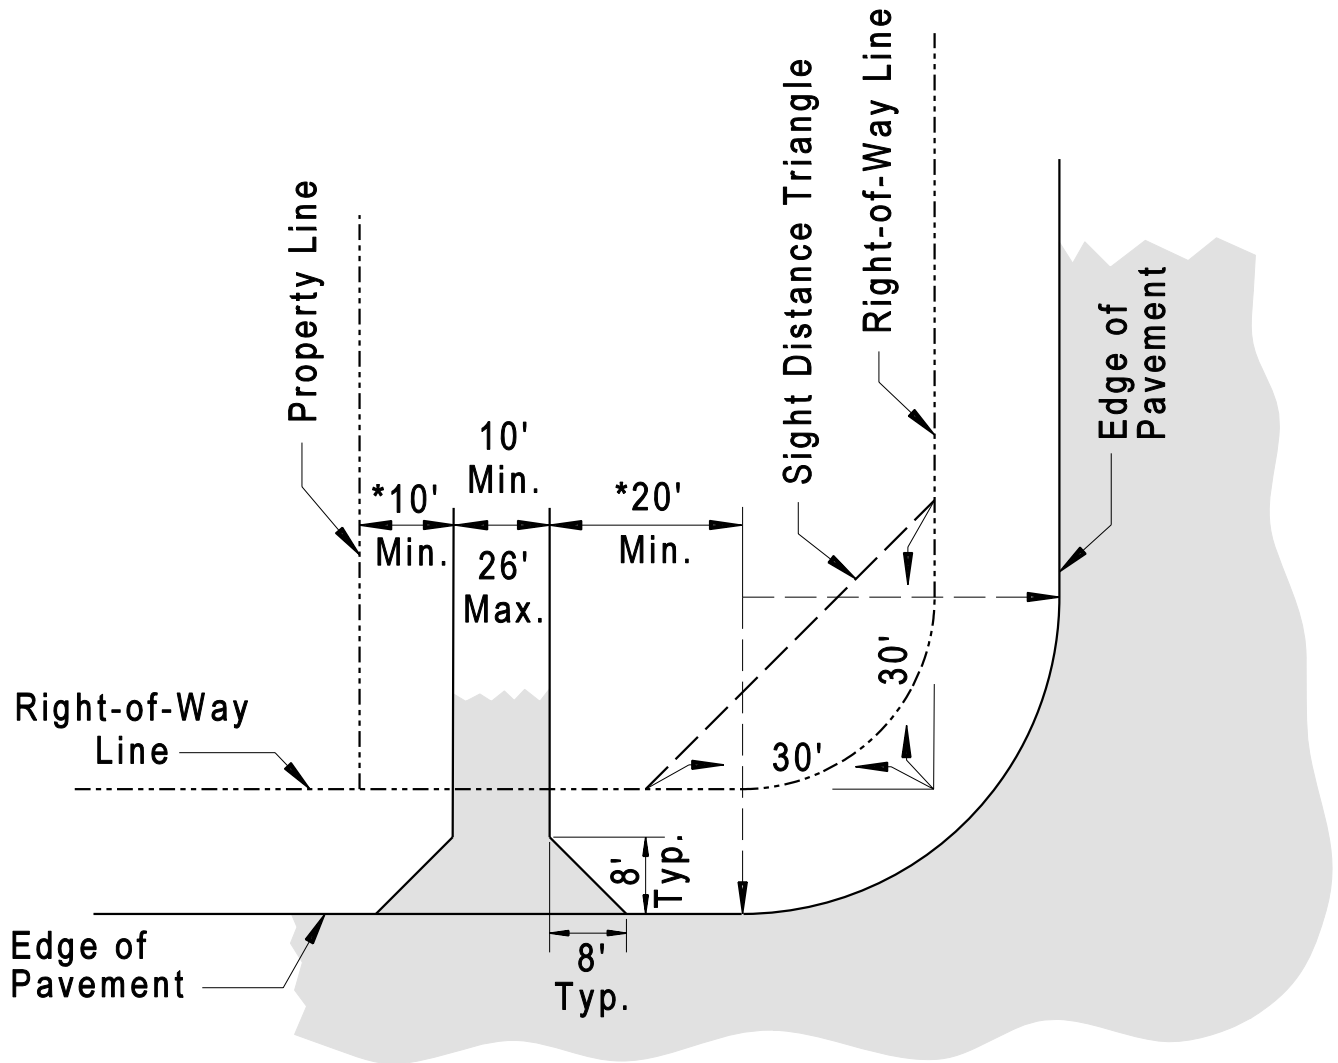

* May be varied to conform to type of entrance construction in approved subdivisions.


TYPE 2 RESIDENTIAL ENTRANCES


NOTE: Drainage shall be provided as specified by the Saint Louis County Department of Highways and Traffic. Culvert pipe may be required.

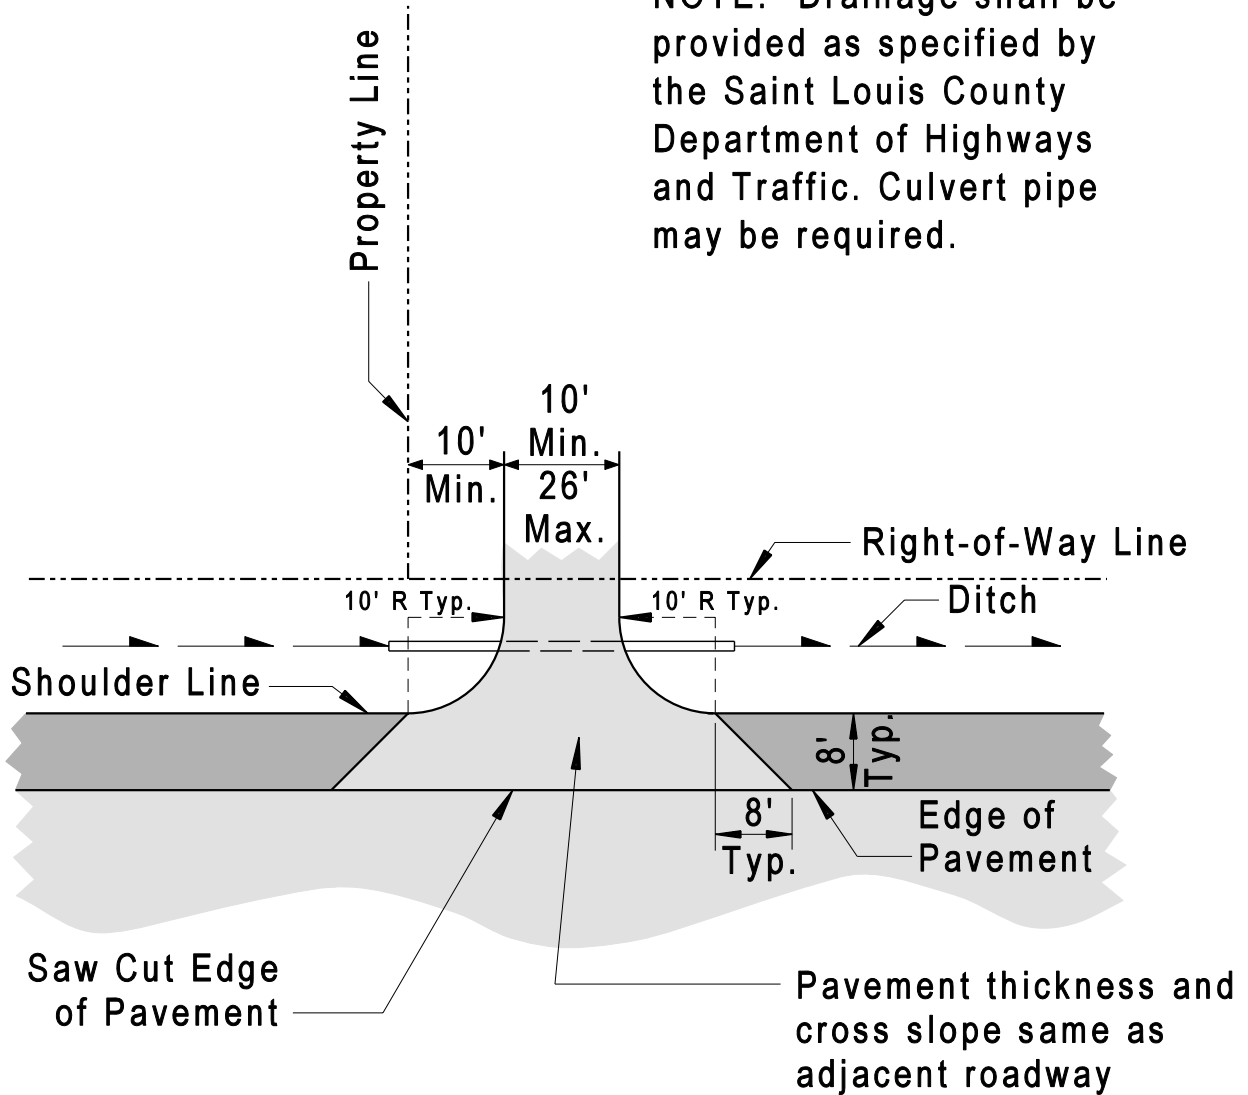

Provide onsite turnaround capabilities and clear vegetation as directed to provide adequate sight distance.


TYPE 3 RESIDENTIAL ENTRANCES

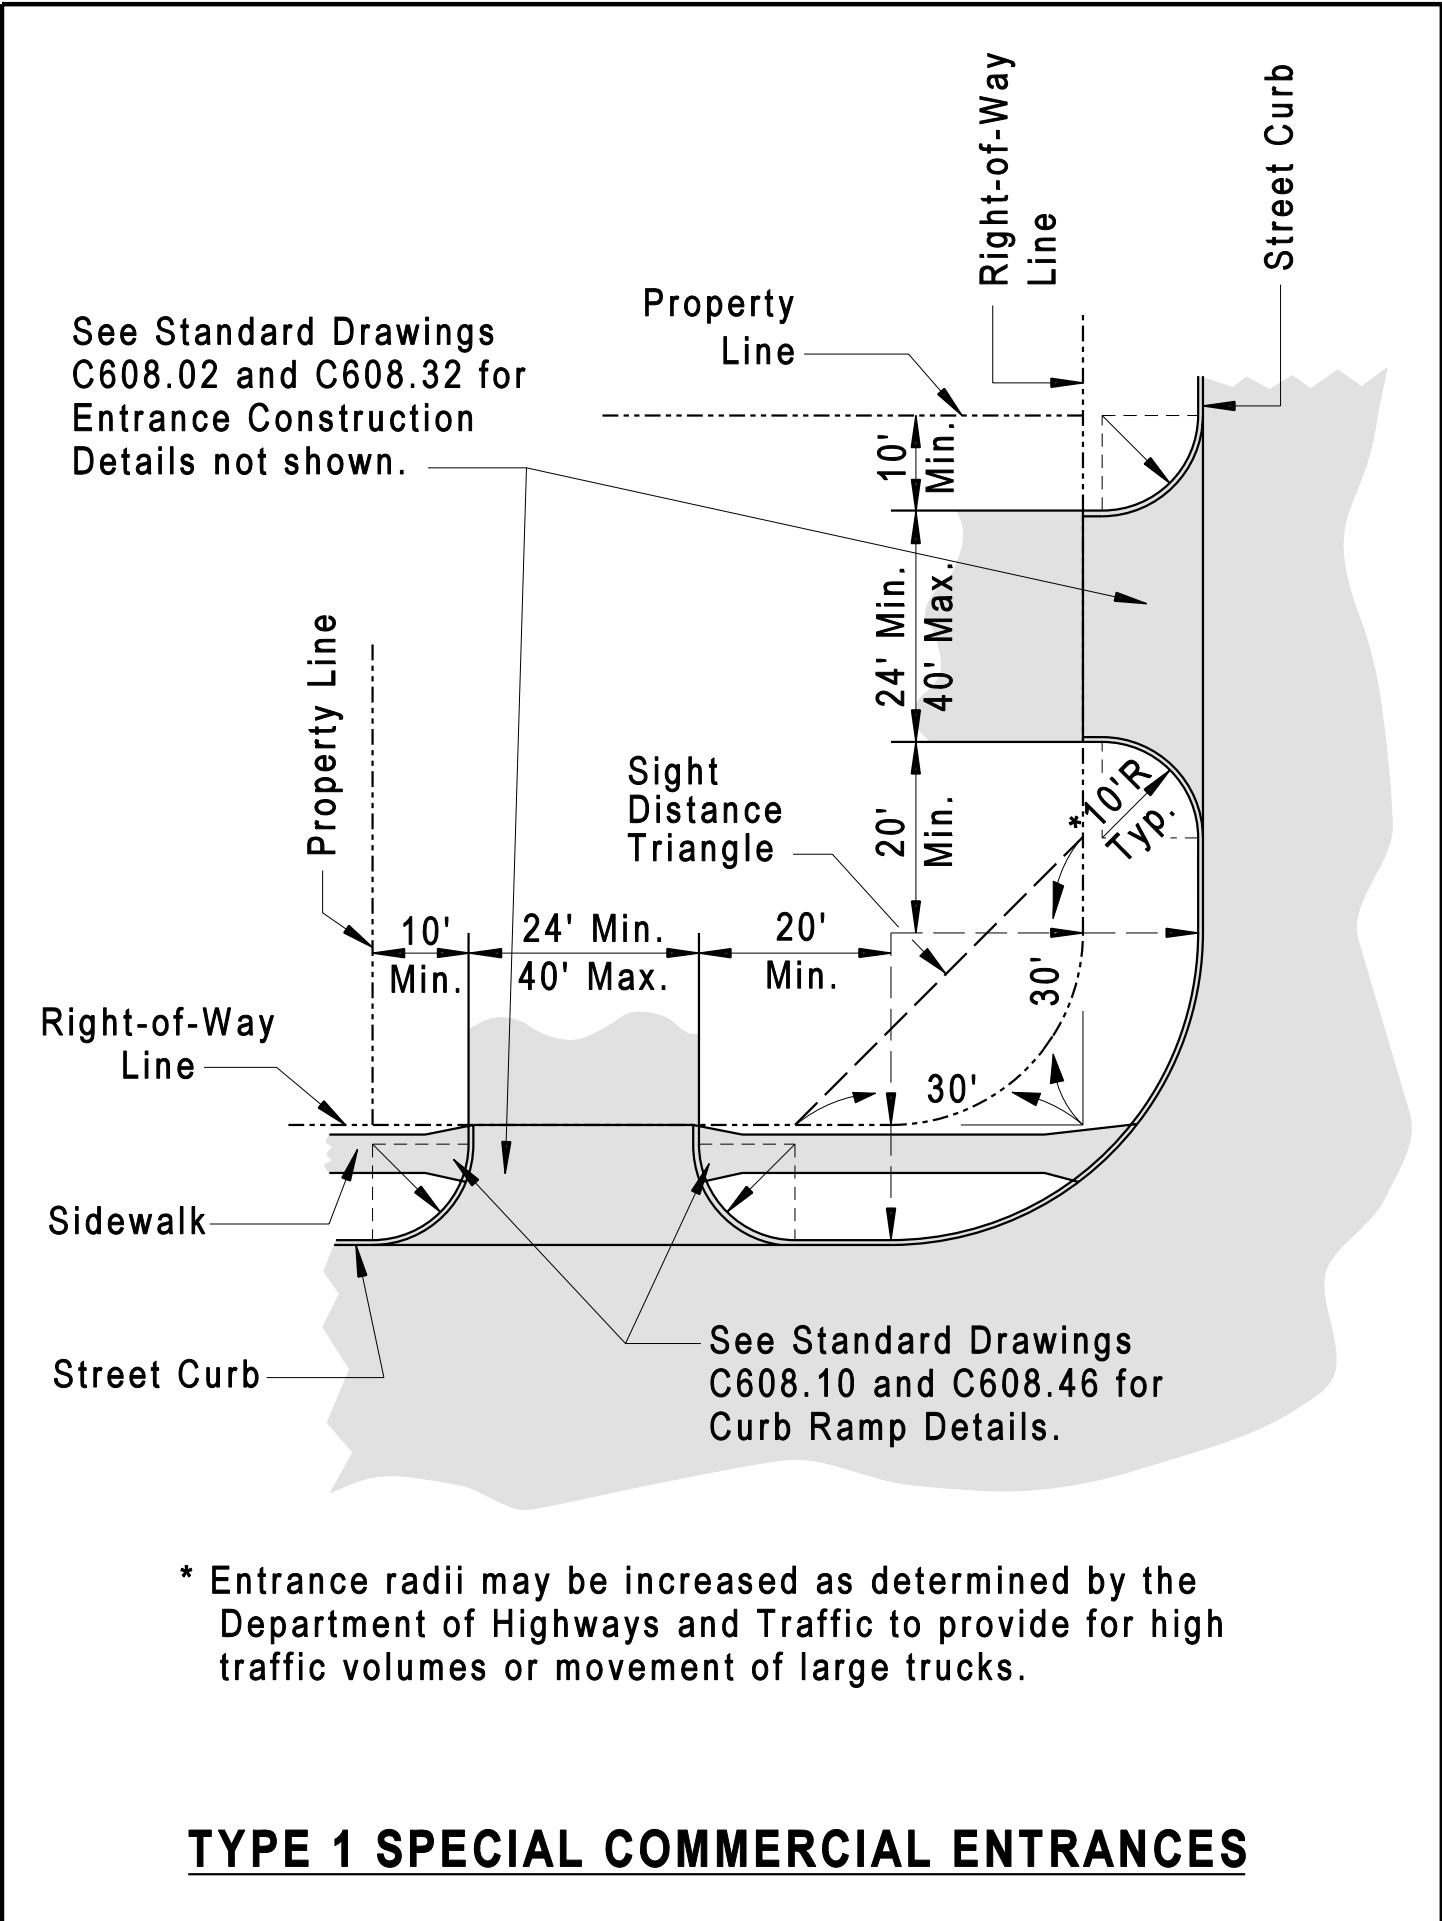

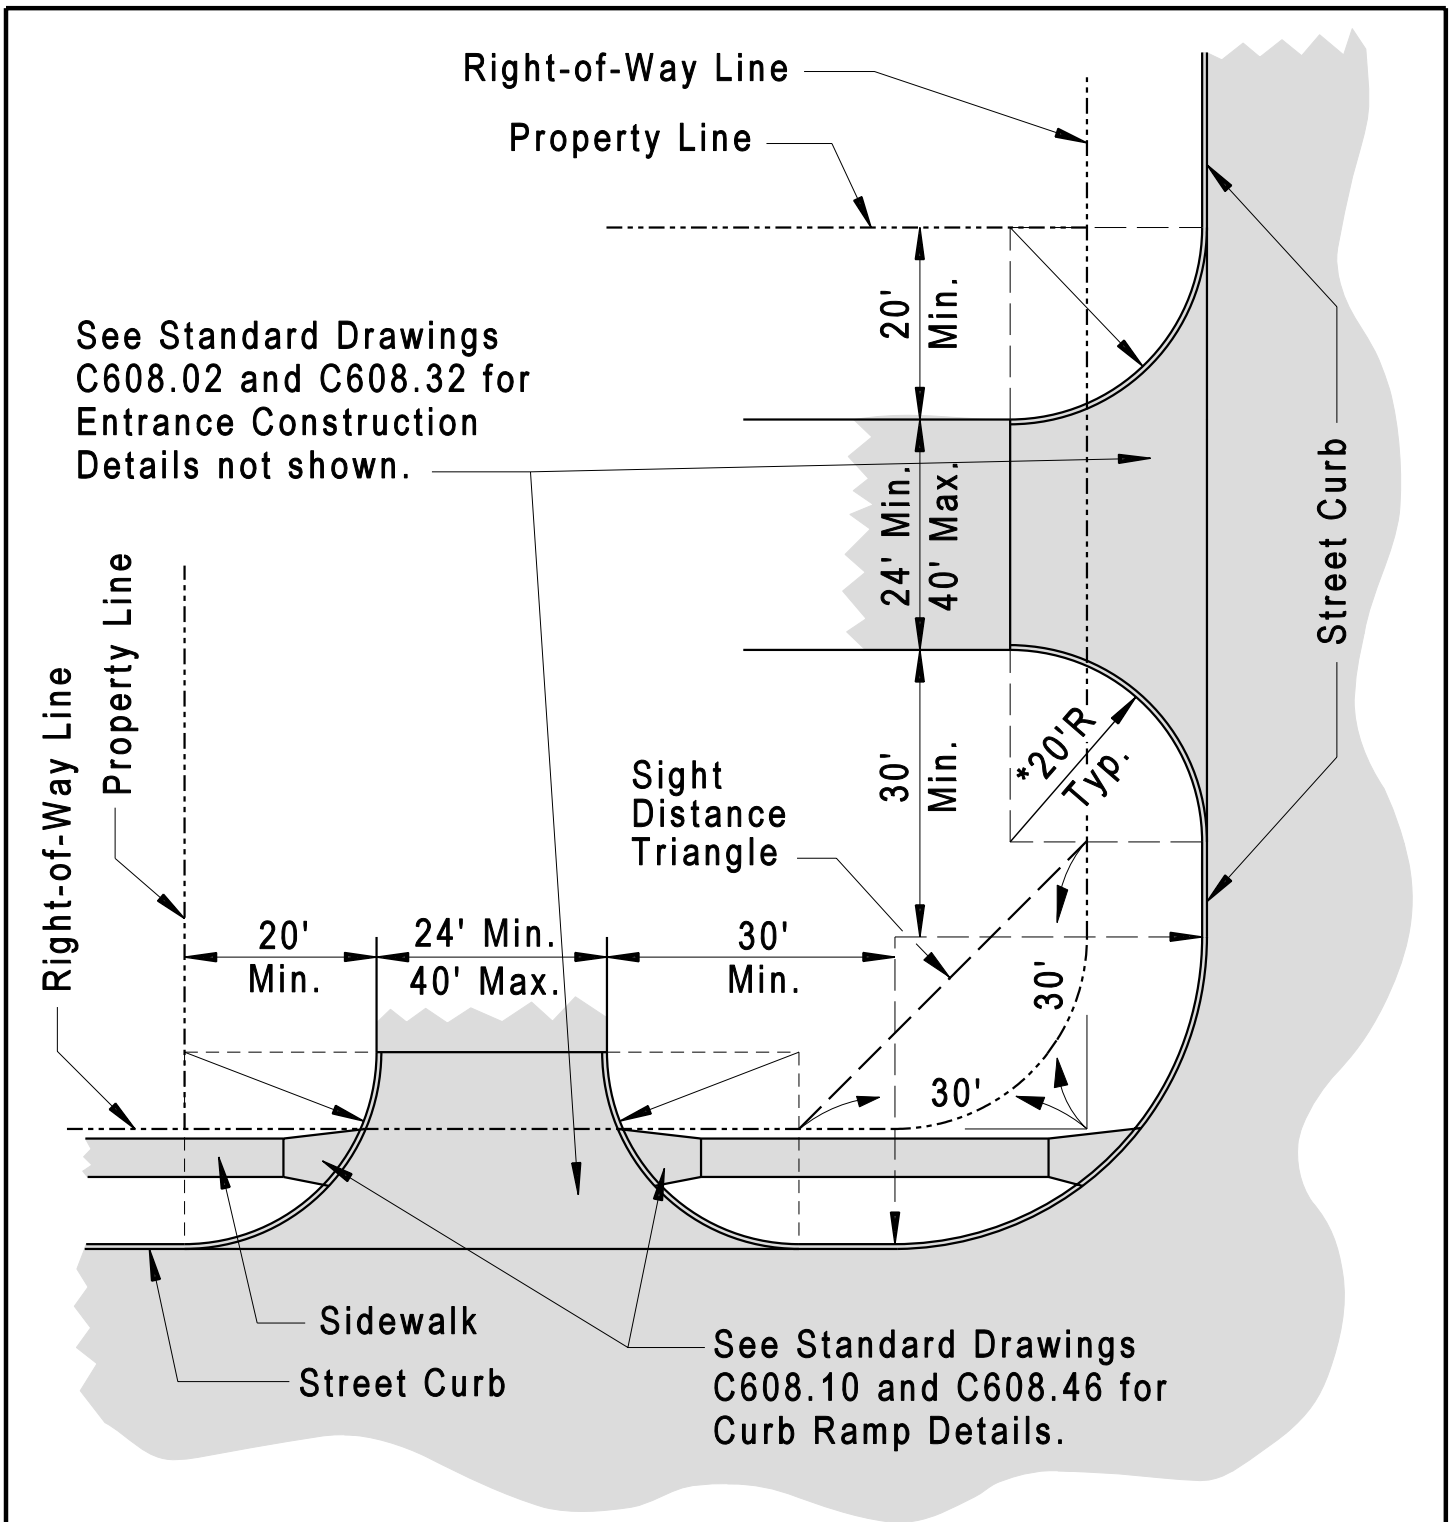

* Entrance radii may be increased as determined by the Department of Highways and Traffic to provide for high traffic volumes or movement of large trucks.

TYPE 2 SPECIAL COMMERCIAL ENTRANCES

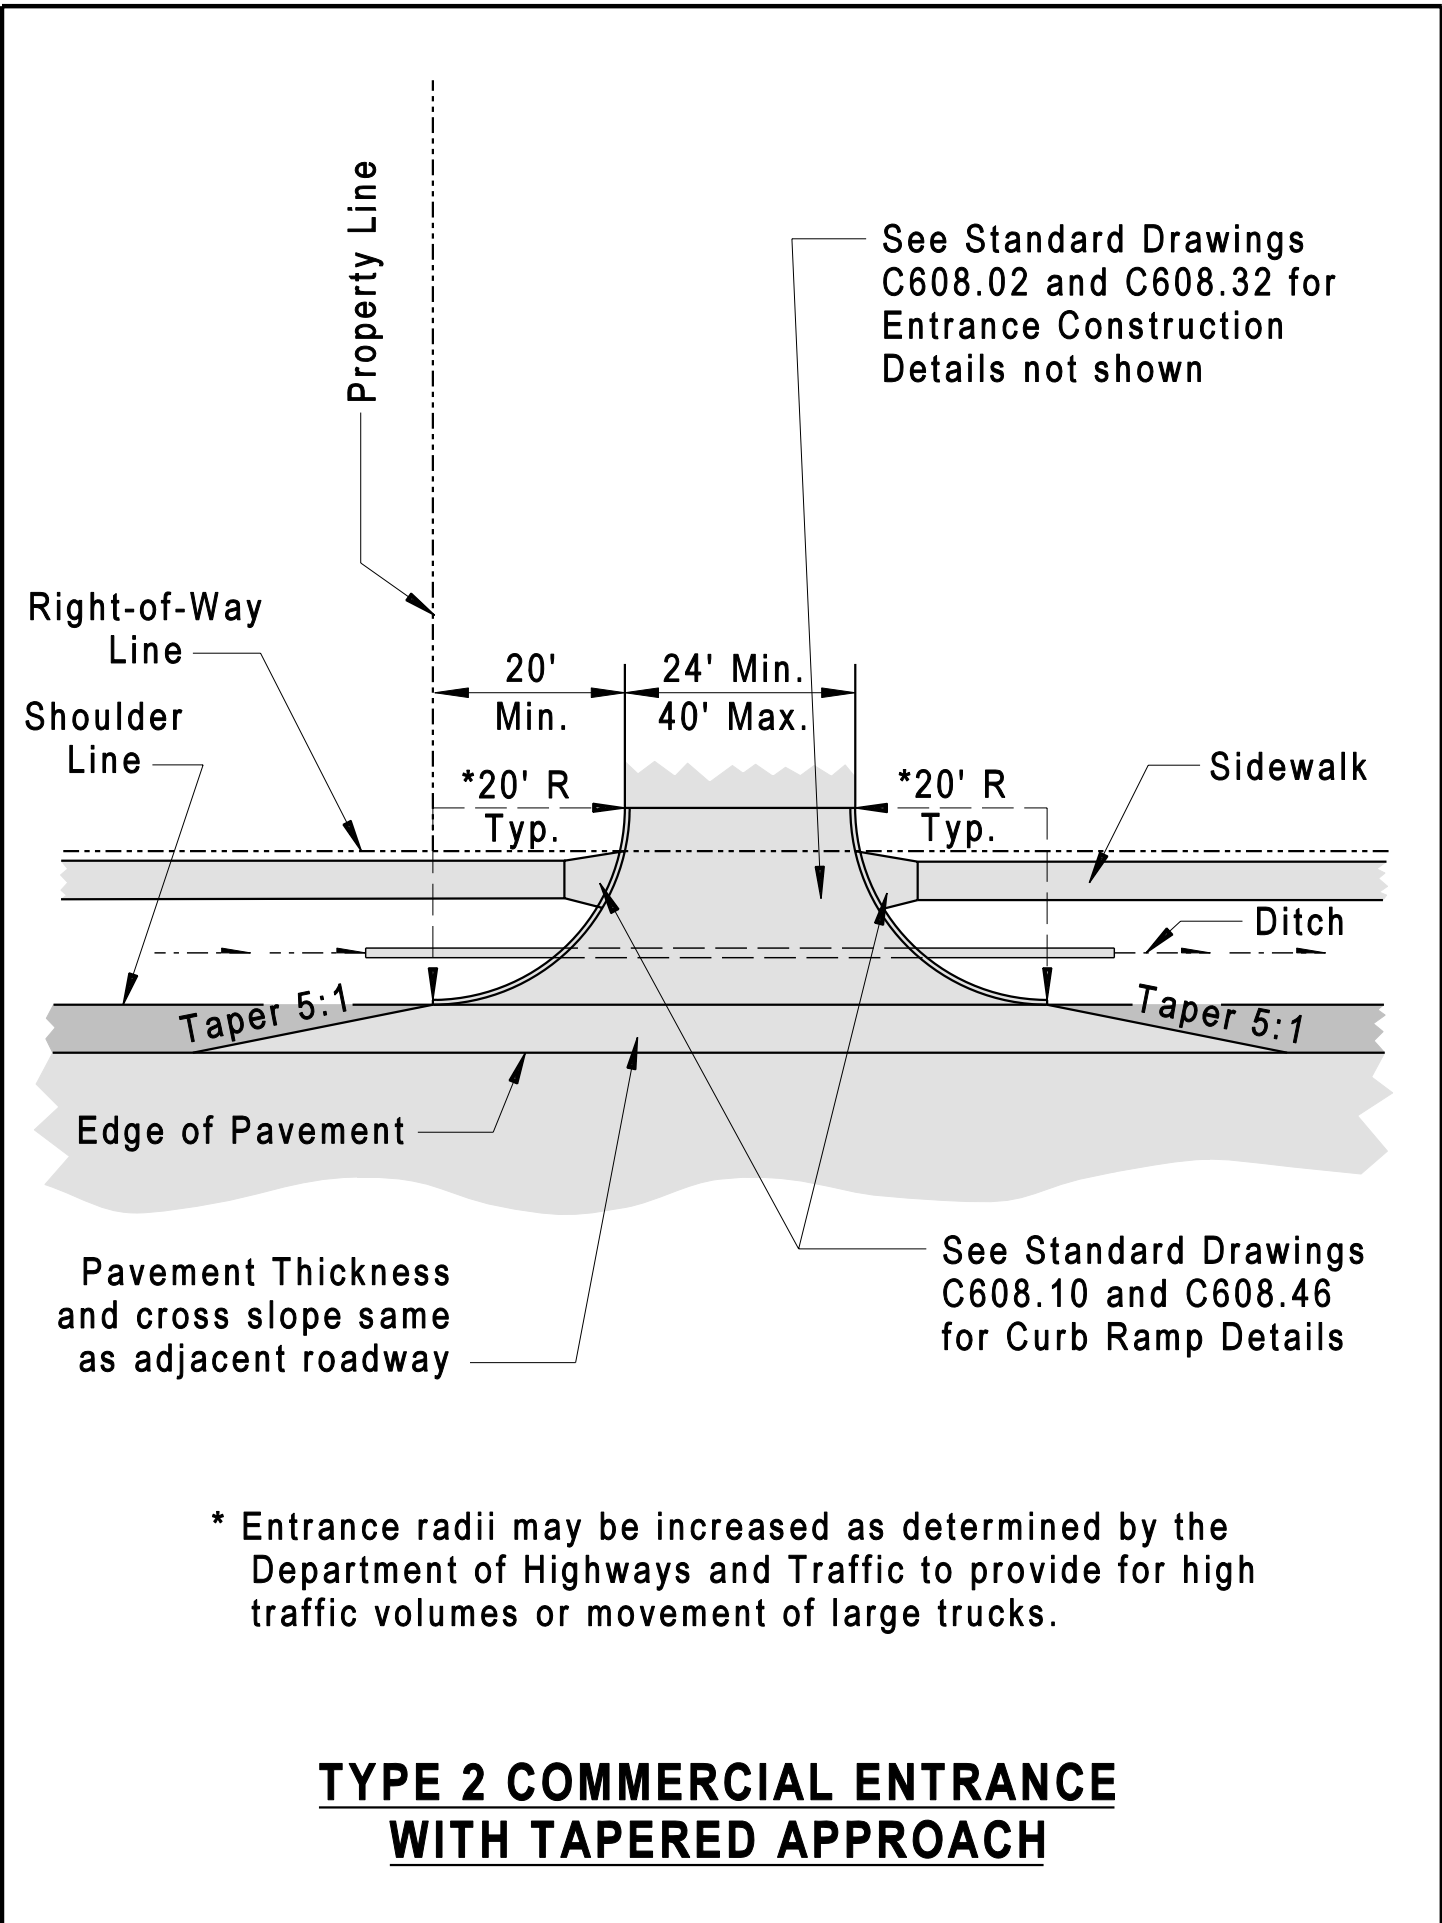


PARKING TABLE

| A | B | C | D* | E | F | G |
|-----|------|-------|-------|-------|-------|-------|
| 45° | 9.0' | 19.7' | 12.5' | 12.7' | 51.9' | 45.6' |
| 60° | 9.0' | 21.0' | 17.5' | 10.5' | 59.5' | 55.0' |
| 90° | 9.0' | 19.0' | 22.0' | 9.0' | 60.0' | — |

A stall dimension of 8.5'x 18.0' or equivalent may be utilized for off-street parking stalls provided in excess of minimum requirements as set forth in this section when designated for compact cars.

On-site parallel parking stalls shall be 9.0'x 22.0' adjacent to a 22' two way lane or 15' one way lane.

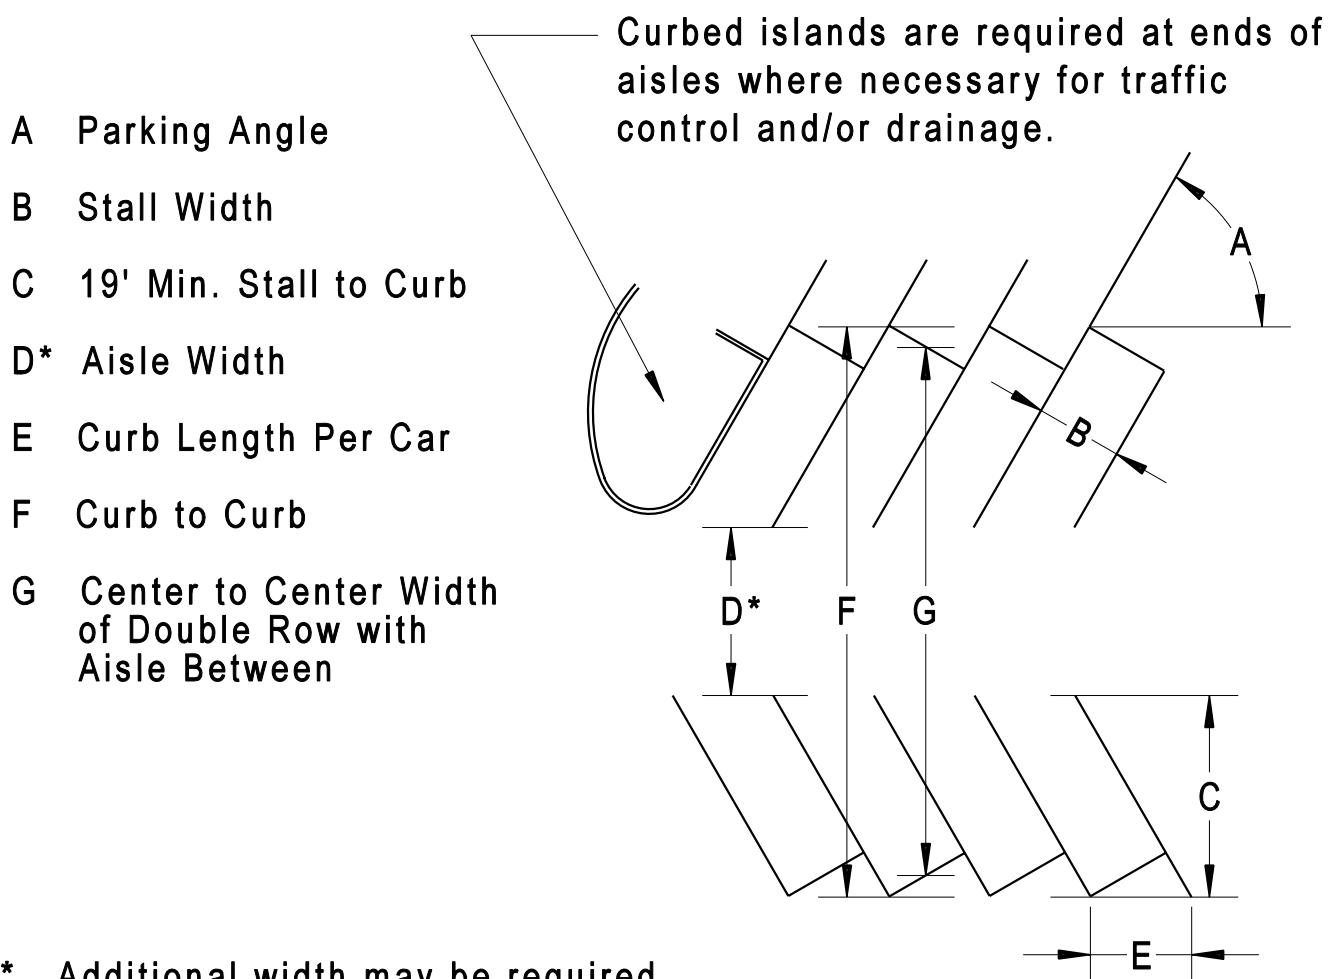

* Additional width may be required where the aisle serves as the principal means of access to on-site buildings or structures.